


USB-C Multiport Triple Screen Docking

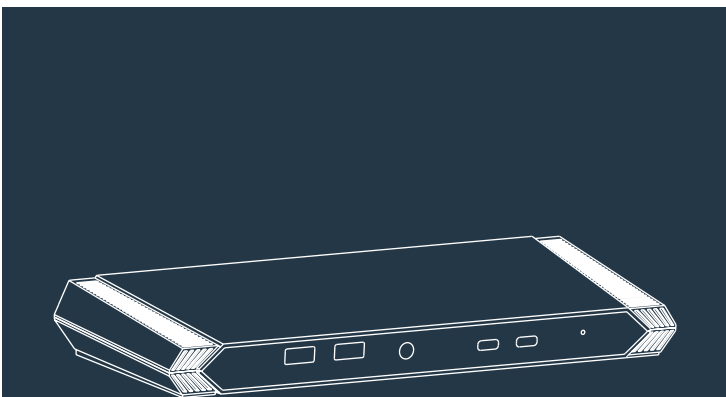

Instruction
Manual

iiglo®

Statement

Thanks for purchasing this product, please read this user manual carefully before using this product. In constant effort to improve our product, we reserve the right to make functions or parameters changes without notice or obligation.

No part of this publication may be reproduced without a written permission. Regardless of any direct acknowledgment elsewhere in the body of this document, hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in these manual and related documents are the property of their respective holders.

Safety instructions

- Keep this manual for future reference.
- Do not dismantle the housing or modify the module to avoid electrical shock or burn.
- Do not twist or pull by force ends of the cable. It can cause malfunction
- Do not expose the unit to rain, moisture or install this product near water.

If any of the following situation arises, get the equipment checked by a service technician:

- The equipment has been exposed to moisture.
- The equipment has been dropped and damaged.
- The equipment has obvious sign of breakage.
- The equipment has not been working well or you cannot get it work according to this instructions manual.

After Sales Services

We provide limited warranty for the product within five years.

Package Content

- 1 x USB-C Dual 4K Universal Docking Station
- 1 x USB-C to C Cable (E-Mark Chip) 1 meter
- 1 x USB 3.0 A to C Cable 1meter
- 1 x Instruction manual
- 1 x DC20V/5A 100Watt Power Adapter

System Requirement

- Windows 7 or later
- Mac OS 10.6 or later
- PC/Laptop that supports PD2.0 charging


1

Product introduction

USB C docking for laptop and MacBooks. This device let you use up to 3 displays at the same time. It also provides you with several choices for connecting different peripherals or to a network. The docking also have four USB A 3.0 and two USB C ports for data transfer, and one of USB A port also supports BC 1.2 fast charging, one USB C port supports PD 65Watt charging for your host.

Product Overview

Front Panel

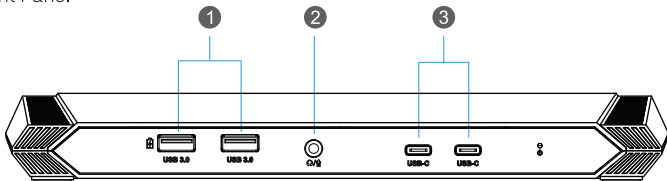

1. Two USB 3.0 Type-A ports:

One is for Type-A peripherals connection.

The other one is for fast charging.


2. 3.5mm miniJack input port:

For connecting mic and headphone.

3. Two USB-C ports:

For connecting to USB-C peripherals.

Rear Panel

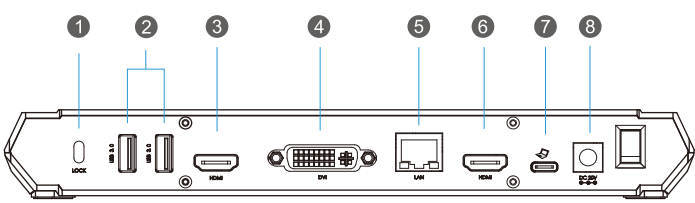

2

1. Safety Lock:

2. Two USB 3.0 Type-A ports:

For connecting Type-A peripherals.

3. HDMI Port:

For connecting to 2K HDMI monitor.

4. DVI Port:

For connecting to 2K DVI monitor

5. 10/100/1000Mbps Ethernet port:

For connecting to Gigabit Ethernet network

6. HDMI Port:

For connecting to 4K HDMI monitor

7. USB-C port (Upstream port):

For connecting to the laptop.

8. Power Jack:

External power supply for dock operation.


Note 1:

Device has two HDMI ports, the upper one and DVI port both are 2K resolution, while the bottom one co-works with USB-C upstream port for supporting 4K@30Hz.

Dual Video Ports Connection

1. To install drivers, please visit <http://www.displaylink.com/downloads> to download the latest driver.
2. Connect your laptop (of Type-A port) to the USB-C port of dock via the USB 3.0 A to C Cable.
3. Connect the other monitor to the DVI port.
4. Plug the dock in a power socket and switch it on.

3

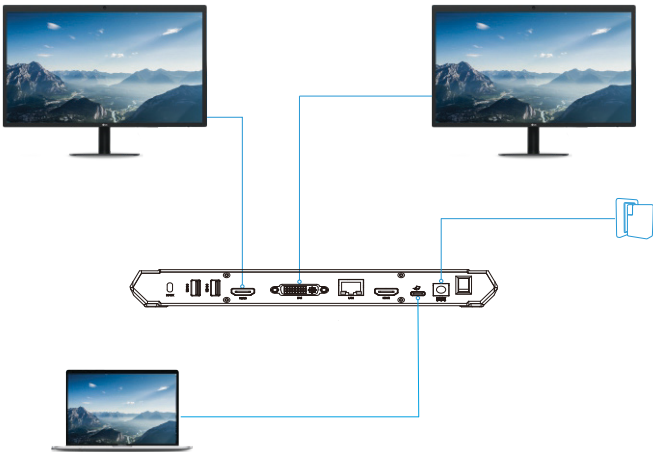


Note 2: Laptops without USB-C ports

You can use USB 3.0 A to C cable if your laptop doesn't have any USB-C port. (This A to C cable is not used for Power Delivery but only for transferring data; if you need to charge your laptop, please connect it to the original power adapter.)

Triple Video Ports Connection

1. Connect your laptop (of Type-C port) to the USB Type-C port through the USB-C to C cable, and it supports max. 60W power to the laptop.
2. Connect a monitor to the upper HDMI port.
3. Connect a monitor of DVI port to the DVI port of dock.
4. Plug the dock in a power socket and turn it on.

4

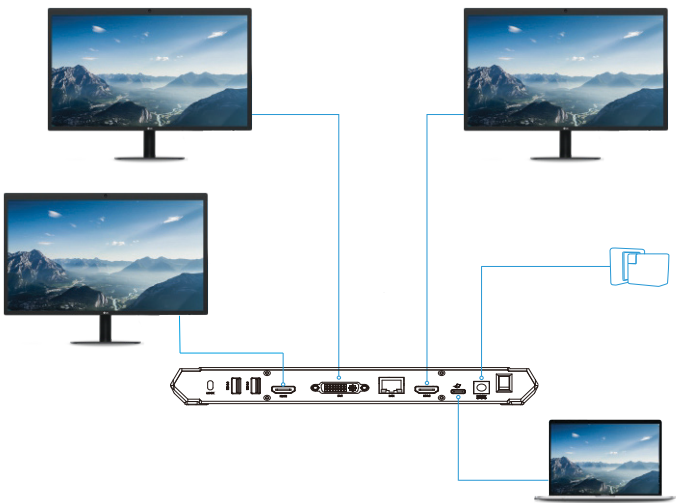

Note 3: For Laptops with USB-C ports

Please check your laptop manual first and make sure whether your laptop is equipped with USB-C and full function USB3.1 (data transfer, upstream charging and VESA Alternate Mode), if it is not, please refer to Note 2; otherwise, just connect your monitors to the dock according to the drawing above.

Driver Download: <https://www.displaylink.com/downloads>

Disclaimer

Information in this document is subject to change without notice. The manufacturer does not make any representations or warranties (implied or otherwise) regarding the accuracy and completeness of this document and shall in no event be liable for any loss of profit or any commercial damage, including but not limited to special, incidental, consequential, or other damage.

MPN: II-USBCTRIPLEDCK

Imported by iiglo, Østre Kullerød 4,
N-3241 Sandefjord, Norway
Made in China | www.iiglo.com

5